


VOLTRA I

User Manual

Quick Start Guide

Disclaimer and Safety Guidelines

v1.1

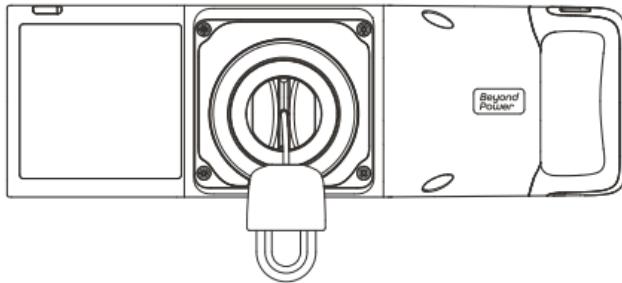

In the Box



Carrying Case



VOLTRA I



Charger



Cable



Carabiner



Reinforced
Screen
Protector



VOLTRA I

In the Box

Quick Start Guide

Disclaimer and Safety Guidelines

Check if all the following items are included in the package. If any item is missing, contact Beyond Power or your local distributor.

Specifications

VOLTRA I

Weight	12.78 lbs (5.8 kg)
Dimensions (L × W × H)	12.71 × 5.49 × 3.94 inches (323 × 139 × 100 mm)
Resistance Range	5 – 200 lbs (2 – 90 kg)
Operating Temperature	32°F – 104°F (0°C – 40°C)
Bluetooth	5.0
Wi-Fi	2.4 GHz

Battery

Battery Type	Lithium-Ion Rechargeable Battery
Capacity	1700 mAh
Power	97.9 Wh
Voltage	57.6 V
Charging Power (Max)	140 W
Rated Input	28V=5A / 20V=3.25A

Cable

Length	112.20 inches (2.85 m)
Diameter	0.11 inches (3 mm)
Material	High-Strength, Synthetic Fiber

Connector

Dimensions (L × W × H)	1.61 × 1.61 × 2.44 inches (40.9 × 40.9 × 62 mm)
Material	Titanium, PE

Beyond+ App

Supported Operating System	iOS
----------------------------	-----

Activation



Download the Beyond+ App




For first-time use of VOLTRA I, please activate it through the Beyond+ application or activate it online according to the VOLTRA I screen prompts.




Scan here for a quick start

Component Introduction

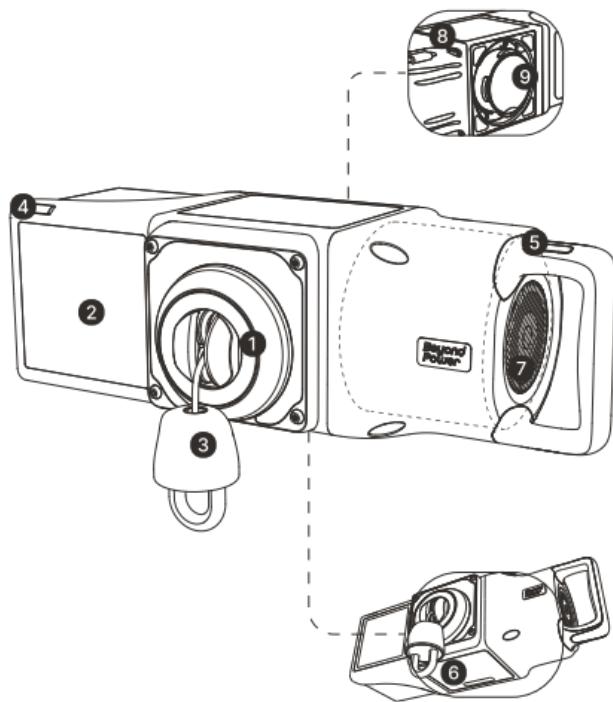


1. Cable Hatch
2. Screen
3. Connector
4. Power Button (On/Off) and Battery Level Indicator
5. Unlock Button (Press and hold the unlock and power buttons for 3 seconds)
6. Cover
7. Fan and Dust Cover
8. Type-C Port
9. Mount Cap

Power On / Off

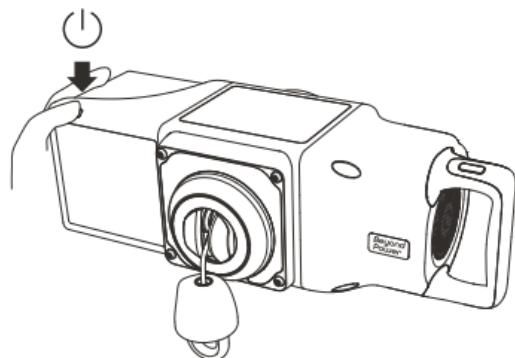


Power on or power off: Press the button once briefly, then hold for 3 seconds.

Lock On / Off

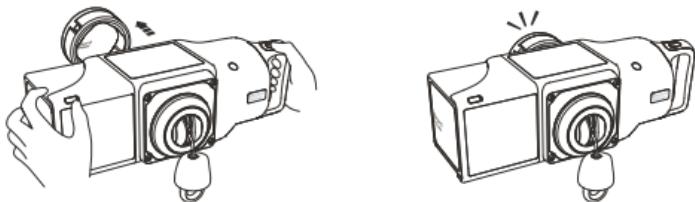

Hold VOLTRA I with both hands and insert it into the mount base.

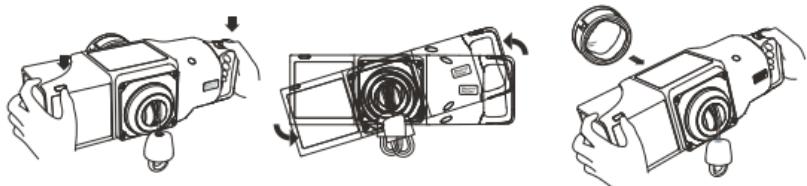

Press and hold both side buttons for 3 seconds, rotate, and pull out.

Home Screen




Software version v1.6

- 1. Battery Level Indicator
- 3. Weight Training
- 5. Damper

- 2. Settings
- 4. Resistance Band

Performance Monitor

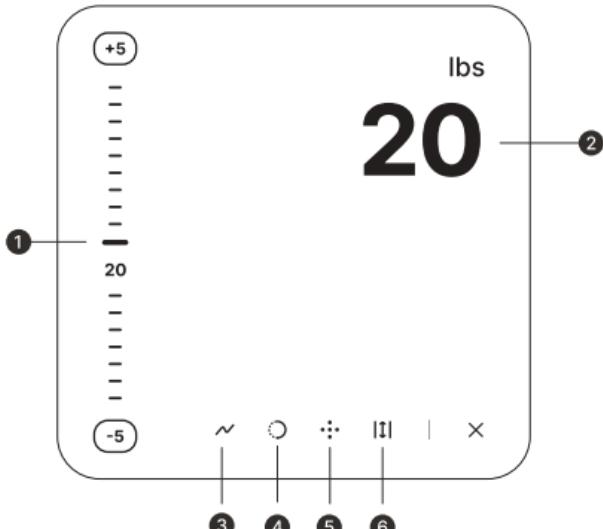


Software version v1.6

- 1. Resistance Adjustment
- 3. Performance Monitor
- 5. Variable Resistance Modes

- 2. Resistance Value
- 4. Assistance Mode
- 6. Setting Cable Length


Customizing Your Zero Position

After using VOLTRA I for a period of time, the cable will naturally stretch, which is a normal phenomenon. Refer to the following steps to adjust the initial zero position.

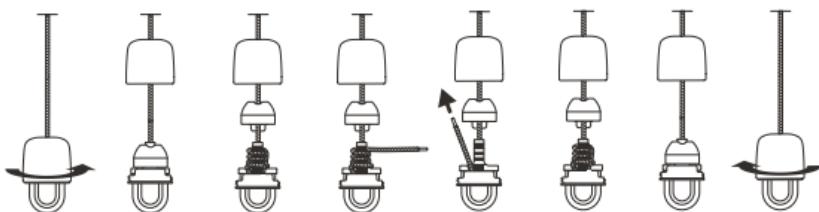


Rotate and open the upper shell of the cable connector as shown in the diagram, release the cable, adjust the cable length to the desired level, and then reassemble the cable connector.


Setting Cable Length

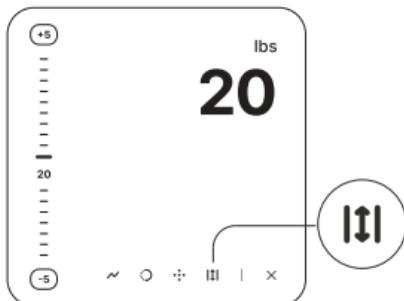

Click on any mode on the homepage, then click |||.

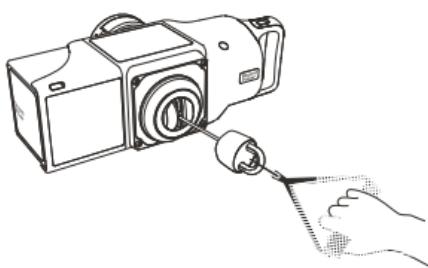


Extend the cable to the appropriate length and hold for 3 seconds.



Software version v1.6

VOLTRA I will now set this cable length as the default position for the remainder of your workout. When powered off or in sleep mode, VOLTRA I will reset to the initial position.

Charging

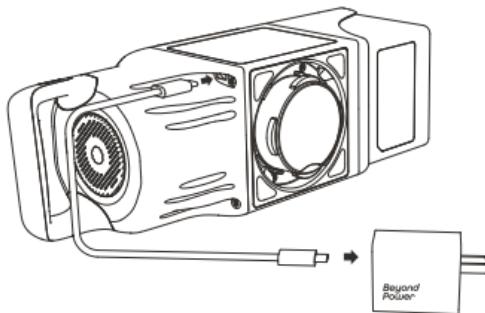

Fully charging VOLTRA I with the included 65W adapter and cable takes about 120 minutes.

Battery Level Indicator

Battery Level	LED Color
5%	Solid Red
25%	Orange
50%	Solid Yellow
80%	Light Green
100%	Solid Green

Product overview

Voltra I utilizes intelligent resistance control, real-time data monitoring, and multi-mode training technologies, making it suitable for rehabilitation therapy, functional training, and performance enhancement. Its motor-driven system precisely adjusts resistance, while high-precision sensors continuously track data to ensure personalization and safety. In the field of rehabilitation, it supports strength recovery, joint training, and neuromuscular reeducation, effectively reducing the risk of injury and improving rehabilitation outcomes.

Warning and Safety Information

When using VOLTRA I, it is crucial to observe basic precautions. Please read all safety information before using VOLTRA I.

Minors

1. VOLTRA I product is designed for individuals aged 18 and older. Keep children under the age of 13 away from this product.
2. Teenagers aged 16 and above may use VOLTRA I under direct adult supervision if approved in advance by a physician. An adult should review all safety information with the minor before use.
3. Keep children away from VOLTRA I and accessories. VOLTRA I contains parts, components, and functions that can cause severe injury or death. You are responsible for the safety of your children and anyone else you allow to use your VOLTRA I.

Warning

1. Do not leave the product unattended while in the unstowed position.
2. Do not cover VOLTRA I with a blanket or any covering. Overheating VOLTRA I may cause fire, electric shock, or injury to people.
3. During use, the motor may generate high temperatures, with a high temperature of 140°F (60°C) or above. After use, avoid touching the motor, allowing it to cool before dismounting or moving.
4. Never use VOLTRA I under the influence of alcohol or drugs.
5. This product is not intended for use by persons with reduced physical, sensory, or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning the use of the product by a person responsible for their safety.
6. Use this product only for its intended use as described in this manual. Do not use attachments not recommended by the manufacturer.
7. Never operate this product if it has a damaged Type-C port, if it is not working properly, if it has been dropped or damaged, or dropped into water. Return the product to a service center for examination and repair.
8. Keep the charging cable away from heated surfaces.
9. Never operate the product with the dust cover blocked. Keep the dust cover free of lint, hair, and other debris.
10. Never drop or insert any object into any opening of VOLTRA I.
11. Avoid operating VOLTRA I where aerosol (spray) products are being used or where oxygen is being administered.
12. Do not overexert yourself or work to exhaustion. Use reasonable judgment when selecting the resistance range. Avoid using excessive resistance, which may cause injury.
13. Perform regular maintenance for optimal performance and longevity. To ensure safety, check VOLTRA I for wear and damage on a regular basis. Replace any damaged or worn parts immediately.
14. Always keep the Type-C port clean and dry. Sweat, spills, and other damage to the Type-C port may result in damage to VOLTRA I and injury.
15. Use only original parts from the manufacturer. Changes or modifications to this unit not approved by Beyond Power could void the warranty.
16. Always unplug VOLTRA I immediately after use and before cleaning or performing maintenance. Service other than the procedures described here must be performed by an authorized technician.

17. This product is intended for indoor use only. Do not store VOLTRA I outdoors, near water, at altitudes above 4000 meters, or in high humidity levels. It is recommended to use the device in an environment with a relative humidity of 5% to 90% without condensation.
18. Always turn "OFF" the product before replacing the cable by yourself.
19. Do not touch contacts together. Do not disassemble or modify the battery by yourself. Do not put the battery in a damp place to avoid danger.
20. Risk of Fire and Burns: Do not open, crush, heat above 40°C/104°F, or incinerate the battery. Do not short circuit. If the battery bulges severely, discontinue use.

Medical Warning

Beyond Power offers health and fitness information and is designed for educational and entertainment purposes only. You should consult your physician or general practitioner before beginning any new fitness program. You should not rely on this information as a substitute for, nor does it replace, professional medical advice, diagnosis, or treatment. If you have any concerns or questions about your health, you should always consult with a physician, general practitioner, or other healthcare professional. Do not disregard, avoid, or delay obtaining medical or health-related advice from your healthcare professional because of something you may have read on the Beyond Power website or heard from Beyond Power or its app. The use of information provided through the Beyond Power service is solely at your own risk and is not medical or healthcare advice.

Nothing stated or posted on the Beyond Power site or available through any Beyond Power service is intended to be, and must not be taken to be, the practice of medical or counseling care. For purposes of these terms, the practice of medicine and counseling includes, without limitation, psychiatry, psychology, psychotherapy, or providing healthcare treatment, instructions, diagnosis, prognosis, or advice. Beyond Power is continually under development and, to the full extent permitted by law, makes no warranty of any kind, implied or express, as to its accuracy, completeness, or appropriateness for any purpose. In that regard, developments in medical research may impact the health, fitness, and nutritional advice that appears here. No assurance can be given that the advice contained in the Beyond Power service will always include the most recent findings or developments with respect to the particular material.

In becoming a user of Beyond Power, with the intent of using the Beyond Power service, you affirm that all of the following statements are true:

1. No physician or general practitioner has ever informed you that you have a heart condition or that you should only do physical activities recommended by a physician or general practitioner;
2. You have never felt chest pain when engaging in physical activity;
3. You have not experienced chest pain when not engaged in physical activity at any time within the past month;
4. You have never lost your balance because of dizziness, and you have never lost consciousness;
5. You do not have a bone or joint problem that could be made worse by a change in your physical activity;
6. Your physician or general practitioner is not currently prescribing drugs for your blood pressure or heart condition;
7. You do not have a history of high blood pressure, and no one in your immediate family has a history of high blood pressure or heart problems; and you do not know of any other reason you should not exercise;
8. Your physician or general practitioner has been specifically consulted by you and approved of your use of Beyond Power's products.

If applicable, you further affirm that you are not pregnant, breastfeeding, or lactating unless your physician or general practitioner has been specifically consulted and has approved your use of this product.

Beyond Power reserves the right to refuse or cancel your membership if we determine that you have certain medical conditions or that the representations set forth above are untrue in any respect.

Maintenance and Routine Inspection

1. Ensure that the battery is not damaged, aged, or deformed prior to use.
2. Before each use, inspect VOLTRA I for any signs of damage or wear. Make sure that other components of VOLTRA I, such as the connector, cable, motor, handle, and accessories, are not damaged, loose, or malfunctioning. If you discover any of these conditions, do not use VOLTRA I until a repair is performed. Contact Beyond Power immediately to schedule an inspection online and arrange further repairs if necessary.
3. If you do not understand how to operate VOLTRA I, contact Beyond Power for an explanation on safe and proper use. Find our contact information at <https://www.beyond-power.com>.
4. Keep the safety guidelines and any warning labels for future reference. Replace any labels if they are damaged, illegible, or removed by contacting Beyond Power at <https://www.beyond-power.com>.
5. Damaged or worn parts should be replaced immediately. Do not attempt to repair VOLTRA I on your own. Do not use VOLTRA I until a proper repair and inspection have been performed.
6. Use of a damaged product could result in serious injury or death.
7. Never operate VOLTRA I if it is not functioning properly. Ensure that other individuals in the household or those who may come in contact with the product know not to use VOLTRA I until maintenance has been performed and the product is in good working order.
8. Do not use alcohol or any other cleaning liquid on VOLTRAI. It is recommended to clean VOLTRAI with a soft, dry cloth.

Error Message

If VOLTRAI fails to function properly and the screen displays the message **"An unexpected error has occurred. Please reach out to our customer service for further."** do not use VOLTRAI. Contact Beyond Power immediately to schedule an inspection online .

Disclaimer and Safety Summary

This product is not a toy. Do not allow children to come into contact with this product or its parts and cables. Please take extra care when using this product in the presence of children.

This product is a handheld, direct-drive cable trainer that provides easy and adjustable resistance training up to 200 lbs when all components are intact and the power source is functioning properly. Beyond Power Inc. reserves the right to update this "Disclaimer and Safety Guidelines" at any time.

You should read the entire user manual and familiarize yourself with the product's functions before operating it. Incorrect operation of this product may cause serious injury to yourself or others, or damage to the product and property. While the product is easy to operate, it requires basic fitness knowledge, including understanding your maximum training strength to prevent the risk of injury during training. Without strong safety awareness, improper operation may result in product damage, property loss, or even serious injury to yourself and others. Do not use components that are not provided or recommended by Beyond Power.

Before assembly, setup, and use, be sure to visit the Beyond Power website (<https://www.beyond-power.com>) to download the "User Manual" and carefully read all instructions and warnings. You understand and agree that without training records, Beyond Power may not be able to analyze the cause of product damage or accidents and may not be able to provide warranty or after-sales services.

Beyond Power is not responsible for any losses caused by the user's failure to follow this document or the "User Manual" when using the product.

By using this product, you are deemed to have understood, accepted, and agreed to all the terms and conditions of this document. The user is responsible for their actions and all consequences therein. The user agrees to use this product solely for its intended purposes and agrees to all the terms and contents of this document and any related policies or guidelines that may be formulated by Beyond Power.

Subject to compliance with laws and regulations, Beyond Power has the final right to interpret this document and all related documents of this product. In the event of updates, revisions, or termination, there will be no further notice. Please visit the Beyond Power official website to obtain the latest product information.

Beyond Power Inc. and its affiliated companies own the trademark VOLTRA. The trademarks or registered trademarks of the mentioned product names and brands belong to their respective companies.

Battery Safety Guidelines

Warning

1. Do not allow the battery to come into contact with any liquid. Avoid immersing the battery in water or exposing it to wet environments, including rainy or humid conditions. Water contact may trigger a decomposition reaction, leading to battery self-ignition or explosion.
2. Only use batteries and charging equipment developed or provided by Beyond Power. If replacement is necessary, please refer to the official Beyond Power website for purchasing information. Using incorrect battery models can pose an explosion hazard. Beyond Power is not liable for any battery accidents or malfunctions caused by non-official batteries or charging products.
3. Do not use or charge swollen, leaky, or damaged batteries. If the battery exhibits abnormalities, contact Beyond Power or an authorized Beyond Power seller for further assistance. If concerned about potential surface scratches on VOLTRA I, consider using a protective case or cover.
4. The battery should be operated within a temperature range of 32°F to 104°F (0°C to 40°C). High temperatures above 104°F (40°C) can accelerate battery aging, reduce battery life, and lead to battery ignition or explosion. Low temperatures below 32°F (0°C) can significantly diminish battery performance.
5. Do not disassemble the battery or puncture it with sharp objects, as this may result in battery ignition or explosion.
6. The liquid inside the battery is highly corrosive. Avoid contact with any leakage. If liquid from the battery comes into contact with the skin or eyes, immediately rinse with clean water and seek medical attention.
7. In the event of a battery fire, it is recommended to employ the following extinguishing equipment in the following order: water or water mist, sand, fire blanket, dry powder, and carbon dioxide fire extinguisher.
8. Do not use a battery that has been involved in a crash or subjected to heavy impact.
9. Exposure of the battery to extremely low air pressure can result in an explosion or the release of flammable liquid or gas.
10. Do not place the battery near heat sources such as direct sunlight, hot car interiors, open flames, or heating furnaces.
11. Do not store the battery completely discharged for a long time to avoid over-discharging, which can cause damage to the battery cells and render them unusable.

Handle a Battery Malfunction

A battery malfunction may occur if an abnormality occurs in the battery cell. The energy stored in the battery could be released suddenly, which can cause a fire. This may be triggered by physical damage to the battery, improper replacement or repair, or temperatures outside the battery's operating range.

Act immediately if you notice any of the following signs of a battery malfunction:

- The lithium-ion battery or a product that contains one begins to smoke or emit sparks or soot.
- The battery pouch suddenly and quickly puffs out.
- The lithium-ion battery or a product that contains one begins to emit hissing or popping sounds.

Smother the battery or product immediately with clean, dry sand. Dump the sand all at once. Timing is critical—the faster you pour all the sand, the sooner the reaction will be contained.

2. Contact local fire authorities if further assistance is needed.
3. Evacuate the room for 30 minutes after the reaction is contained. Ventilate the area. Do not return until the area is clear of smoke.
4. Wait for 30 minutes before touching the product. Wear heat-resistant gloves and safety glasses with side shields to remove the product from the sand.
5. Clean affected areas:
 - i. Wipe any affected areas with water first.
 - ii. Then, wipe the area with an ESD-safe cleaning solution.
 - iii. Dispose of the damaged battery or product (including any debris removed from the sand) according to local environmental laws and guidelines.

Caution

1. After completing the charging process, disconnect VOLTRA I from the charger.
2. If the product will not be used for more than 10 days, discharge the battery to a capacity of 40%–65% to prolong battery life.
3. Recharge and discharge the battery every three months to maintain battery health.
4. Regularly check the battery level indicators to monitor the current battery level. The battery is designed for 200 cycles, and it is not recommended to continue using it after reaching this limit. Refer to the User Manual for detailed instructions.
5. Store batteries in a clean environment to prevent stains or dirt from accumulating on the battery.
6. Use only the provided charging cable and Beyond Power power adapter to charge the battery.
7. Other third-party cables and power adapters must comply with applicable national/regional regulations and international safety standards for battery charging. Using adapters that do not meet applicable safety standards may pose risks of death or injury.
8. Do not use damaged cables or chargers, or charge in damp environments, as this can result in fires, electric shocks, injuries, or damage to VOLTRA I or other property.
9. When charging VOLTRA I using the charging cable (in the box), ensure that the USB connector of the charging cable is fully inserted into the power adapter (in the box) before plugging it into a power outlet. During use or charging, ensure that VOLTRA I, the charging cable, and the power adapter are placed in well-ventilated areas.
10. When the charging cable is connected to a power source, avoid prolonged skin contact with the charging cable and connectors, as it may cause discomfort or injury.
11. VOLTRA I and Beyond Power USB power adapters comply with the surface temperature limits defined in applicable national/regional regulations and international safety standards. However, even within these limits, prolonged contact with hot surfaces can cause discomfort or injury. When operating the product for an extended period or when the product is connected to a power source for an extended time, use common sense to avoid skin contact with such products or power adapters.
12. For safe operation of the Beyond Power USB power adapter and to reduce the risk of injury or damage due to heat, plug the power adapter directly into a power outlet. Do not use the power adapter in damp locations, such as near sinks, bathtubs, or showers, and avoid plugging or unplugging the power adapter with wet hands. Stop using the power adapter and any connecting cables if any of the following conditions exist:
 - i. The plug or port of the power adapter is damaged.
 - ii. The charging cable is worn or has other damage.
 - iii. The power adapter is heavily exposed to moisture or water.
 - iv. The power adapter has been dropped, resulting in damage to the casing.

Cable Safety Guidelines

Warning

1. DO NOT use the cable and the connector that are not provided by Beyond Power. If a replacement is needed, refer to Beyond Power's official website for purchasing information. Beyond Power will not be responsible for any training accidents caused by the use of unauthorized cables.
2. DO NOT use VOLTRA I if the cable has notches, obvious rough edges, loose fibers, or if the cable health level is shown as under 5%. If any of the above situations occur, replace the cable immediately or contact Beyond Power or a designated agent for further assistance.
3. The cable is intended for use in dry areas only. Do not use it outdoors or on damp surfaces.

Caution

1. When using VOLTRA I, be cautious of inadvertently twisting the cable. Twisting can cause premature wear. Regularly check the cable and untwist it as necessary. Refer to the "User Manual" for detailed instructions.
2. With frequent training, the cable may extend outward, which is a normal occurrence. Use scissors to shorten the cable and correct the zero position as needed. Refer to the "User Manual" for detailed instructions.
3. Perform periodic maintenance to ensure the cable's proper functionality and prolong the lifespan of your VOLTRA I. The cable health level can help you determine when maintenance is required. Refer to the "User Manual" for detailed instructions.

Cable Health Level

100%	Health
20%	Replace the cable
5%	 Do not use

Prior Use Safety Guidelines

Warning

1. DO NOT use this product if you have reduced physical, sensory, or mental capabilities, or if you lack experience and knowledge of the product, unless you receive supervision or instruction from a trained professional.
2. DO NOT place any objects near the dust cover on the motor end. Do not use VOLTRA I if the dust cover is blocked.
3. DO NOT install, charge, or use VOLTRA I outdoors, in a bathroom, or within 10 feet (3 meters) of a swimming pool. Do not use it on wet surfaces or expose it to moisture, rain, or snow.
4. DO NOT attempt to use VOLTRA I until it has been securely locked into the mount provided by Beyond Power.
5. VOLTRA I uses a fishbone connector for accessory attachments. While the cable may be compatible with third-party connectors, Beyond Power cannot guarantee the quality and safety of such attachments.

Caution

1. Consult your physician before starting to use VOLTRA I or any fitness program, especially if you are over 65 or have preexisting health conditions. Incorrect or excessive training can result in serious injury or death.
2. Certain exercise programs or equipment may not be suitable for everyone. Consult your physician before using VOLTRA I.
3. If you experience faintness, chest pain, shortness of breath, or any other abnormal symptoms, stop exercising immediately and consult a physician.

4. If you are taking medication that may affect your heart rate, consult your physician before using VOLTRA I.
5. Review the accessory manual for safe use.

Training Safety Guidelines

Warning

1. DO NOT release the handles when they are pulled out; it may result in product damage or serious injury. Bring the handles back to the initial position before releasing them.
2. Always keep your training direction directly in front of VOLTRA I and maintain a distance of at least 12 inches from the product. Deviating from the direction may result in injuries and product damage.
3. Excessive force or aggressive movements could lead to injuries across the body, including feet, ankles, or legs. Exercise with caution.
4. DO NOT handle any part of VOLTRA I with wet hands or wet wipes.
5. DO NOT insert objects into any openings on the product.
6. DO NOT allow sweat to drop or enter any openings, especially the cable hatch.
7. Keep head, hands, limbs, fingers, and hair clear of moving parts while the product is in use.
8. Perform regular inspection and maintenance as recommended.
9. Keep unsupervised children and pets away from VOLTRA I.

Caution

1. Always wear appropriate exercise clothing and shoes when using VOLTRA I. Avoid loose clothing or jewelry that could get caught in the product.
2. Allow a clear area of 7x 7 in front of the product during use. Pay attention to your surroundings and communicate with others in the home if using VOLTRA I in a shared space.
3. Keep the area around the product free from exercise equipment, furniture, and other objects.
4. Start slowly and progress gradually. Even if you are experienced, make sure you are familiar with VOLTRA I and its movements before attempting more advanced workouts.
5. If you experience faintness, chest pain, shortness of breath, or any other abnormal symptoms, stop using VOLTRA I immediately. Consult your medical provider before resuming your training.
6. Speed, power, and other displayed metrics may be subject to error. Values should be used for reference only and may not provide an exact measurement of your output when using VOLTRA I.
7. Beyond Power may update the product periodically without prior notice, which may result in changes or loss of data, access, features, or functionality. Refer to the terms of use for additional details.

After Training

Warning

1. Always slowly retract the connected accessories to the cable hatch, return the cable and connector to its zero position, detach accessories, and, if VOLTRA I is not used for an extended period, fully stow the product in its packaging.
2. In case of a malfunction of the electronic lock, follow the emergency dismount instructions on the bottom cover of VOLTRA I and immediately contact Beyond Power for further assistance.

Glossary

Thank you for your interest in Beyond Power Inc. (Hereinafter referred to as "Beyond Power," "we," or "us"). This document includes the following terms to help you understand the potential risks that may occur if the product is not operated correctly. When you are instructed to use the product in a specific manner, it is important to follow all the guidance provided. If you are unsure about anything, it is recommended to stop using the product and consult the help manual or seek advice from a professional before continuing to use VOLTRA.

These warnings and cautions apply to the product and, where applicable, to all tools, accessories, cables, or power adapters.

Warning

If you do not follow the instructions provided, there is a risk of causing damage to your property, experiencing significant accidents, and suffering serious injuries.

Caution

Not adhering to these instructions may lead to property damage and injuries.

Compliance information

FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution

1. To comply with FCC RF exposure compliance requirements, a separation distance of at least 20 cm must be maintained between the antenna of this device and all persons.
2. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

EU Compliance Statement: Beyond Power Inc. affirms that this device adheres to the essential requirements and pertinent provisions of Directive 2006/66/EC and its Article 4 amendment of Directive 2013/56/EU—Heavy Metal content in Batteries and Accumulators.



Waste electrical products must be handed over to a designated collection point for disposal to be recycled in an environmentally sound manner. Improper disposal of this product could result in harm to the environment or to human health. Check with your local waste authority or the retailer where you purchased this product for available collection facilities or further recycling advice.

Please avoid the generation of waste from electrical products as much as possible, e.g., by giving preference to products with a longer service life or by reusing used electrical products instead of disposing of them.

You are responsible for deleting any personal data from this product before disposing of it.

	Manufacturer		TELEC symbol
	Date of manufacture		RoHS symbol
	Serial number	 R 201-210888	SRRC symbol
	Polarity of d.c. power connector		CQC symbol
	Caution		KC symbol
	Stand-by		FCC symbol
	European Union	 PS E	PSE symbol
	CE marking	 Bluetooth SPECIAL INTEREST GROUP	Bluetooth SIG symbol
	WEEE symbol		Recycling symbol

Subscribe for more information.

**Beyond
Power**



wiki.beyond-power.com

Visit the website for the complete User Manual.



201-210888



RoHS



FC



Bluetooth
SPECIAL INTEREST GROUP



Manufactured and designed by Beyond Power Inc.
United States address: 2093 PHILADELPHIA PIKE #9965
CLAYMONT, DE19703
China address: Unit 2201, Building B, Galaxy World Mall, 1
Yabao Road, Bantian, Longgang, Shenzhen, Guangdong,
China
Email: support@beyond-power.com



Beyond Power Technology B.V.
John M. Keynesplein 1, 1066EP Amsterdam
Beyond Power@gmail.com
TEL: 123456789-1

Copyright © 2024 Beyond Power Inc. All rights reserved.
Beyond Power, the Beyond Power logo, and VOLTRA are trademarks
of Beyond Power Inc., filed applications in the U.S. and China.

Printed in China.